
ARCVIEW

SPECIFICATION SHEET · 2026

ARC-CW150 STICK / UNITIZED

Curtain Wall & Facades

Façades engineered, tested and shipped by one team.

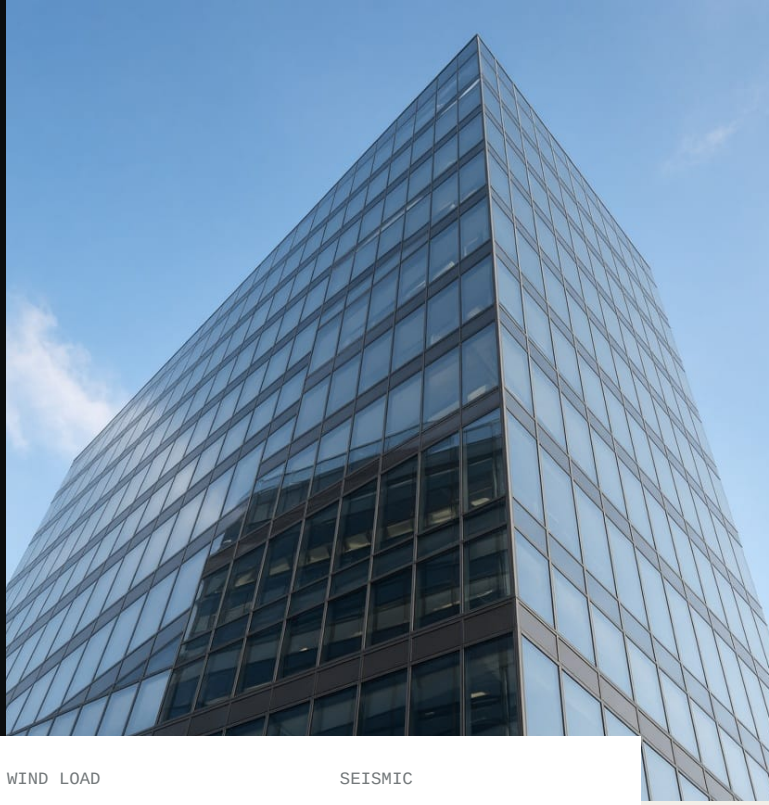


MULLION DEPTH	FLOOR HEIGHT	WIND LOAD	SEISMIC
120 – 250 mm	**up to 6 m**	**up to 4,000 Pa**	**±25 mm drift**

Stick and unitized curtain wall engineered in-house, with structural calcs, shop drawings and mock-up testing for commercial towers.


TECHNICAL DATA

Air permeability	**AE1200** EN 12152
Water tightness	**RE1500 (1,500 Pa)** EN 12154
Wind load	**4,000 Pa design · 6,000 Pa safety** EN 13116
Thermal transmittance Ucw	**from 1.2 W/m²K** EN ISO 12631
Seismic drift	**±25 mm inter-storey** AAMA 501.4
Mullion depth	**120 – 250 mm** –
Floor-to-floor height	**up to 6 m** –

CONFIGURATIONS



STICK SYSTEM · 3 BAYS



UNITIZED · WITH VENT

GLAZING

- Double or triple IGU up to 3 × 6 m
- Heat-strengthened laminated outer pane
- Ceramic frit and spandrel panels
- Heat-soak tested toughened glass

HARDWARE

- Concealed top-hung parallel vents
- Stainless brackets with 3-D adjustment
- Dow / Sika structural silicone
- Integrated blinds and BMU restraint points

LEAD TIME	MINIMUM ORDER	WARRANTY
45–60 days after shop-drawing approval	**Project-based**	**10 years system · 15 years coating · 10 years sealant**

export@arcview-systems.com · WhatsApp +86 138 2345 6090 · Foshan Arcview Aluminium Systems Co., Ltd.

Indicative values for standard configurations. Project values are confirmed on shop drawings.