
ARCVIEW

SPECIFICATION SHEET · 2026

ARC-F68 / F80 HEAVY

Bi-fold Folding Doors

Open an entire wall to the terrace.

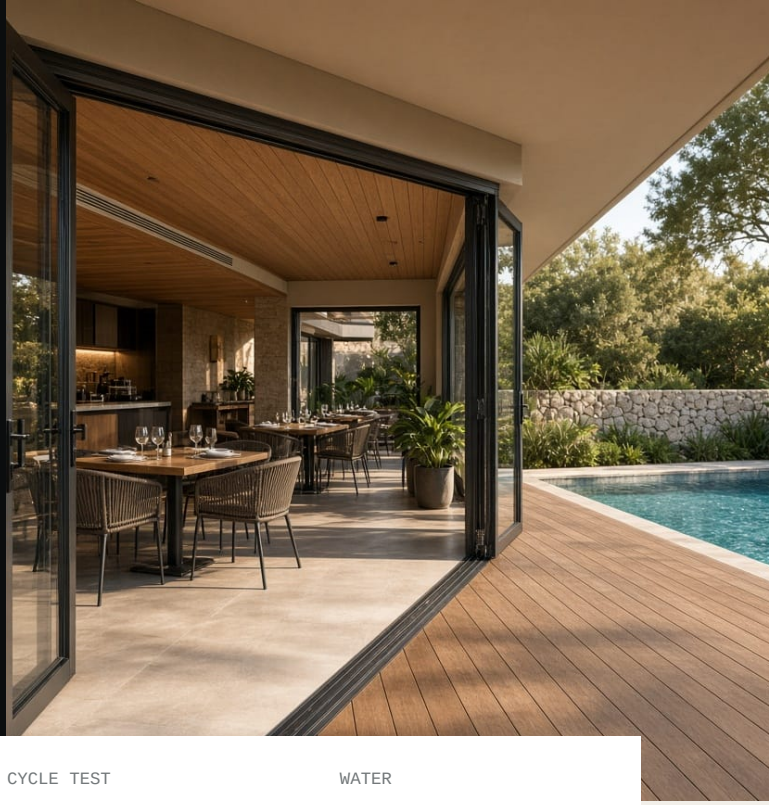


MAX PANEL	MAX OPENING	CYCLE TEST	WATER
1.2 × 3.2 m	**9.6 m wide**	**30,000 cycles**	**up to 600 Pa**

Open an entire wall. Top-hung, zero-sag folding systems tested to 30,000 cycles — built for restaurants, terraces and pool houses.


TECHNICAL DATA

Air permeability	**Class 3** EN 12207
Water tightness	**Class 7A (300 Pa) · 600 Pa with high sill** EN 12208
Wind load	**C3 (1,200 Pa)** EN 12210
Thermal transmittance Ud	**from 1.4 W/m²K** EN ISO 10077-2
Cycle durability	**30,000 cycles** EN 1191
Max panel weight	**120 kg** –
Frame depth	**68 / 80 mm** –

CONFIGURATIONS



3-PANEL · LEFT STACK



5-PANEL WITH TRAFFIC DOOR



6-PANEL · SPLIT STACK

GLAZING

- 24–34 mm double IGU
- Toughened safety glass as standard
- Low-E and solar control coatings
- Laminated for balustrade-height panels

HARDWARE

- Stainless 304 top track and roller carriages
- Concealed hinge pins, no visible fixings
- Flush-bolt and multi-point locking
- Magnetic panel catches

LEAD TIME	MINIMUM ORDER	WARRANTY
25–35 days	**No minimum for distributors**	**10 years system · 15 years coating**

export@arcview-systems.com · WhatsApp +86 138 2345 6090 · Foshan Arcview Aluminium Systems Co., Ltd.

Indicative values for standard configurations. Project values are confirmed on shop drawings.