
ARCVIEW

SPECIFICATION SHEET · 2026

ARC-P100 MONOLITH

Pivot & Entrance Doors

An entrance your clients will remember.

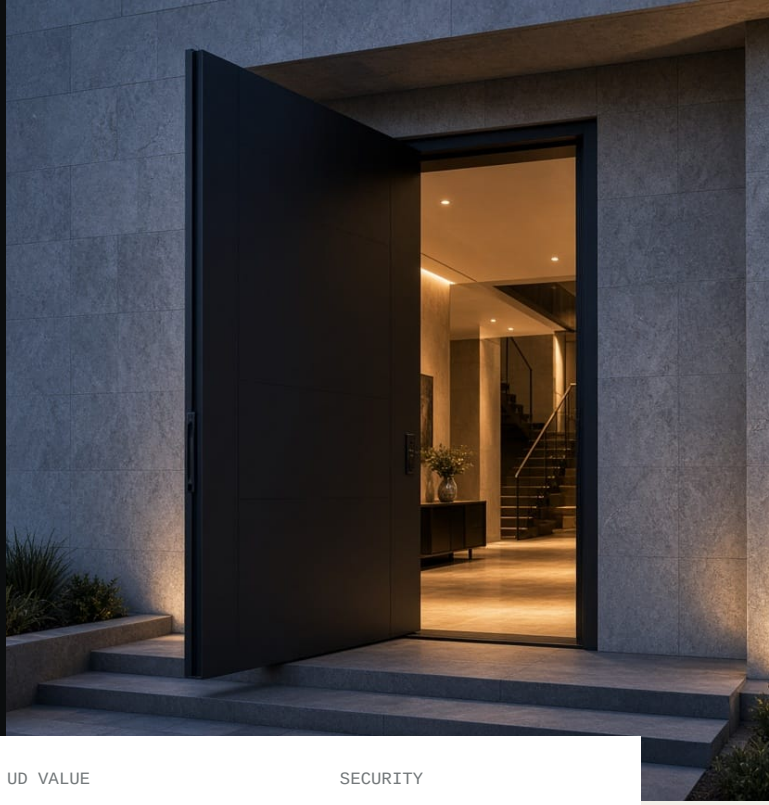


MAX LEAF	LEAF DEPTH	UD VALUE	SECURITY
1.8 × 4.0 m	**100 mm**	**from 0.8 W/m²K**	**RC2 / RC3**

Statement entrances up to 1.8 m wide and 4 m tall on hydraulic pivots, with 3-point locking and biometric access ready.


TECHNICAL DATA

Air permeability	**Class 4** EN 12207
Water tightness	**Class 7A** EN 12208
Wind load	**C3** EN 12210
Thermal transmittance Ud	**from 0.8 W/m²K** EN ISO 10077-2
Burglar resistance	**RC2 / RC3** EN 1627
Max leaf	**1.8 × 4.0 m · 500 kg** –

CONFIGURATIONS



SINGLE PIVOT



PIVOT + FIXED SIDELIGHT

GLAZING

- Solid insulated panel as standard
- Triple-glazed vision panels
- Laminated security glass P4A
- Reeded and fluted decorative glass

HARDWARE

- FritsJurgens System M+ or Dorma pivots
- 3- or 5-point automatic locking
- Fingerprint, keypad and smart-lock ready
- Full-height stainless or bronze pull handles

LEAD TIME	MINIMUM ORDER	WARRANTY
30–40 days	**1 unit**	**10 years system · 15 years coating · 2 years electronics**

export@arcview-systems.com · WhatsApp +86 138 2345 6090 · Foshan Arcview Aluminium Systems Co., Ltd.

Indicative values for standard configurations. Project values are confirmed on shop drawings.