


Pivot & Entrance Doors

An entrance your clients will remember.

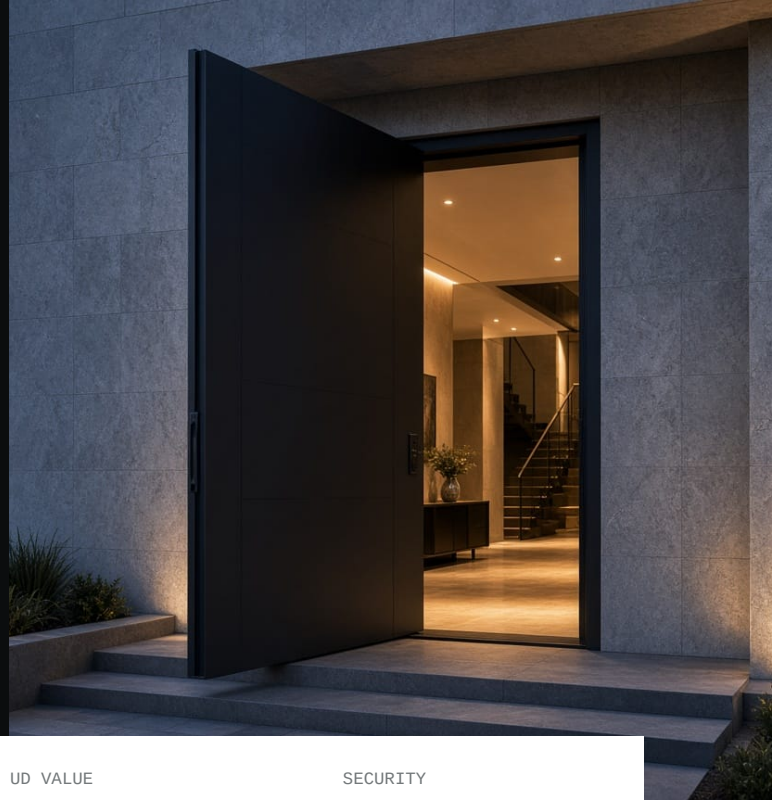

MAX LEAF

1.8 × 4.0 m

LEAF DEPTH

100 mm

UD VALUE

from 0.8 W/m²K

SECURITY

RC2 / RC3

Statement entrances up to 1.8 m wide and 4 m tall on hydraulic pivots, with 3-point locking and biometric access ready.


TECHNICAL DATA

Air permeability	Class 4 EN 12207
Water tightness	Class 7A EN 12208
Wind load	C3 EN 12210
Thermal transmittance Ud	from 0.8 W/m²K EN ISO 10077-2
Burglar resistance	RC2 / RC3 EN 1627
Max leaf	1.8 × 4.0 m · 500 kg —

CONFIGURATIONS



SINGLE PIVOT



PIVOT + FIXED SIDELIGHT

GLAZING

- Solid insulated panel as standard
- Triple-glazed vision panels
- Laminated security glass P4A
- Reeded and fluted decorative glass

HARDWARE

- FritsJurgens System M+ or Dorma pivots
- 3- or 5-point automatic locking
- Fingerprint, keypad and smart-lock ready
- Full-height stainless or bronze pull handles

LEAD TIME

30–40 days

MINIMUM ORDER

1 unit

WARRANTY

**10 years system · 15 years coating ·
2 years electronics**